Technical Specifications

STARVIS 5MP IR Dome AI IP Camera

FOR EXTERNAL APPLICATION

- 30fps at 5MP
- H.265, H.264 and MJPEG compression
- Embedded VCA Technology Video Analytics
- Deep Learning - Object Tracker/People Tracker
- SMART Bitrate Control and Region of Interest
- Power over Ethernet (IEEE 802.3af)

CAMERA	
Model	**IPAi365-FR**
Image Sensor	SONY STARVIS EXMOR 1/2.8" 5M CMOS
Effective Pixels	2592(H) x 1944(V)
Scanning System	Progressive scanning
AGC Control	Auto
IRIS Type	Auto Exposure
Minimum Illumination	Color: 0.13 Lux / B/W : 0 Lux (IR LED On)
Lens	2.8 mm(F1.8)
Angle of View	Horizontal: Approx. 102.4° Vertical: Approx. 77.4°
Shutter Time	Auto / Manual: 1/30 ~ 1/32,000, Anti-Flicker, Slow Shutter (1/2,1/3,1/5,1/6,1/7.5,1/10)
Day & Night	True Day & Night (Removable IR-cut filter)
Wide Dynamic Range	True WDR
S/N Ratio	50 dB

IR ILLUMINATOR	
IR LED	High Power IR LED x 2
IR Working Distance	25m

VIDEO	
Video Compression	H.265, H.264, MJPEG
Profile	H.264 : MP / HP H.265 : MP
Multiple Profile Streaming Performance	2592x1944/30 + 720p30 with H.264,H265 + MJPEG
Max Resolution	2592 x 1944
Video Bit Rate	100Kbps ~ 10Mbps Multi-rate for Preview and Recording
Bitrate Control	Multi Streaming CBR/VBR (Controllable frame rate and Bandwidth)
Digital Noise Reduction	3D-DNR
Privacy Mask	16 programmable zones
Special Features	SMART Bitrate Control, Region of Interest
Other Image Processing	Configurable Exposure, White Balance, Sharpness
Image Orientation	Flip / Mirror / Corridor Mode
Analogue Output	-

AUDIO	
Audio Compression	G.711 u-law 8KHz, AAC-LC 48Kbps at 8KHz
Audio input	Built-in Mic, Supply voltage : 2.4VDC(3mA), Input impedance : 3K Ohm
Audio output	Line Out, MAX. Output Level : 1Vrms

EVENT	
Event Trigger	Motion Alarm, Temperature critical, DI
Pre-Post Recording	Pre: 1~5 sec Post: 1~240 sec
Event Notification	FTP, E-mail, Alarm-out, SD card

NETWORK	
Ethernet Standard	10 /100Base-T
IP	IPv4
Protocol	TCP/IP, UDP, AutoIP, RTP(UDP/TCP), RTSP, NTP, HTTP, HTTPS, SSL, DNS, DDNS, DHCP, FTP, SMTP, ICMP, SNMPv1/v2/v3(MIB-2), ONVIF
Security	HTTPS(SSL), IP filtering, 802.1x, Digest Authentication
Plug In	ONVIF Profile S, CGI API

GENERAL	
Material	Aluminum Die-casting, White
External I/O Terminals	1 x Alarm In / 1 x Alarm Out
Language on webpage	English
Power Source	DC12V, PoE(IEEE 802.3af)
Power Consumption	DC12V Max 7.1W, PoE Max 9.6W
Operating Conditions	Humidity 10 ~ 90% RH (non-condensing) [DC12V / PoE] -30°C ~ 50°C (-22°F ~ 122°F)
Approvals	FCC, CE, IP67, IK10
NDAA	Compliant
Weight	0.4 kg
Dimensions (D x H)	Ø105mm x 60.7mm

EDGE STORAGE	
Storage	1x microSD / microSDHC / microSDXC (card not included)

VIDEO ANALYTICS

Features

Analytics Engine VCA Technology's advanced tracking algorithm with rich library of detection behaviors

Detection Zones and Rules 40 rules & zones (Multi-segment Polygons and Lines) as standard

Intrusion Detection Detection of the presence of an object

Tamper Detection Supported as standard

Detection Behavior Enter, Exit, Appear, Disappear, Stop, Direction, Dwell filter, Abandoned/Removed object filter, Tailgating, Color Filter

Logical Rules Extends standard rules to allow various combinations of the inputs

Deep Learning Object Tracking Deep learning based object identification (as Person, Cyclist, Car, Van, Truck, Motorcycle, Bicycle, Bag) removes false object detection

Deep Learning People Tracking Deep learning based people identification and tracking

Counting & Line High accuracy people and vehicle counting, 20 counters in total

Meta Data JSON format, Plain XML format that contains the event information and the tracked object information with the bounding box, tail history, object attributions (object type and color)

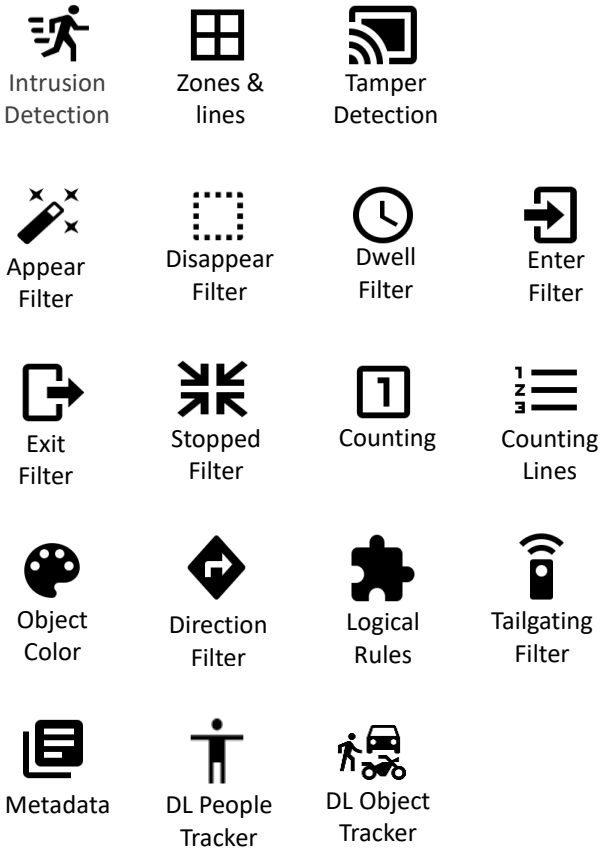

Dimensions

(Unit: mm)

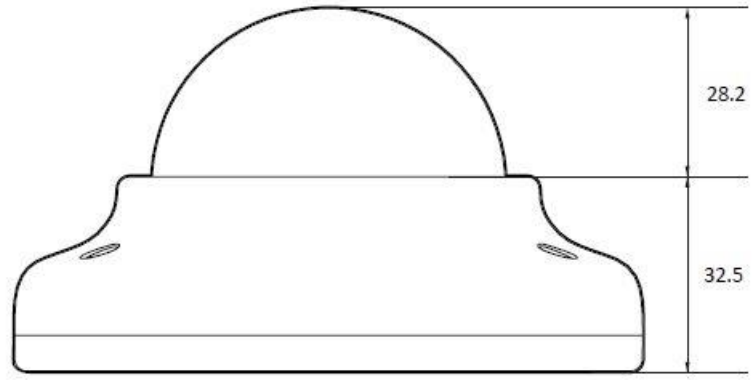

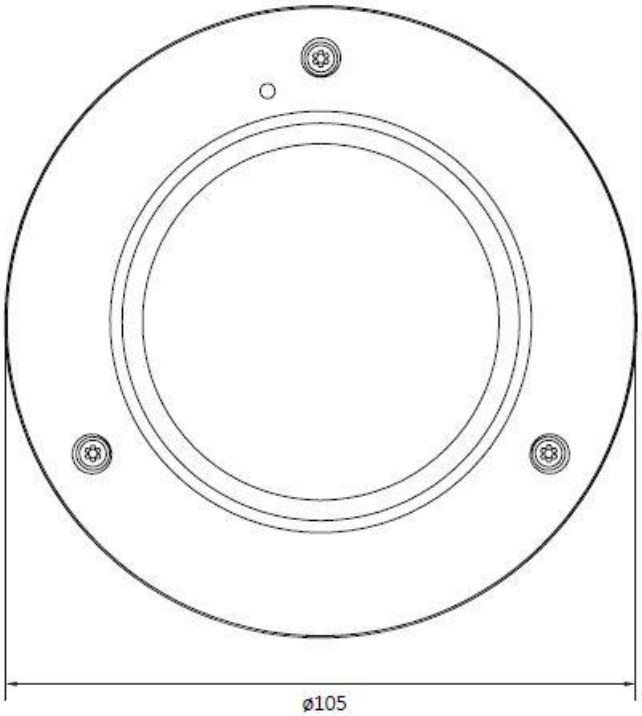

Accessories

BW11

BC11

BP01

BCO01

VCA Technology Ltd.

15, Riverside Court, Beaufort Park Way,
Chepstow, Monmouthshire, NP16 5UH, UK
Email: info@vcatechnology.com

© VCA Technology Ltd.| 01-2023-B