

## Technical Specifications

# STARVIS 5MP ANPR IR Bullet AI IP Camera

FOR EXTERNAL APPLICATION

- 30fps at 5MP
- H.265, H.264 and MJPEG compression
- License Plate Recognition
- Deep Learning - Object Tracker/People Tracker
- SMART Bitrate Control and Region of Interest
- Remote zoom and focus lens (Auto-focus)



CAMERA	
Model	IPAi65A05-ZRL
Image Sensor	SONY STARVIS EXMOR 1/2.8" 5M CMOS
Effective Pixels	2592(H) x 1944(V)
Scanning System	Progressive scanning
AGC Control	Auto
IRIS Type	P-IRIS
Minimum Illumination	0 Lux (IR LED On)
Lens	6 – 50 mm, F1.6
Angle of View	Horizontal: Approx. 40.8° (Wide) to 6.9° (Tele)
Shutter Time	Auto / Manual: 1/30 ~ 1/32,000, Anti-Flicker, Slow Shutter (1/2, 1/3, 1/5, 1/6, 1/7.5, 1/10)
Day & Night	Black & White only

IR ILLUMINATOR	
IR LED	6 x High Power LED
IR Working Distance	20 m

LICENSE PLATE RECOGNITION	
Detection Range	20m
Detection Speed	Max. 80km/h

VIDEO	
Video Compression	H.265, H.264, MJPEG
Profile	H.264 : MP / HP H.265 : MP
Multiple Profile Streaming Performance	2592x1944/30 + 720p30 with H.264, H.265 + MJPEG
Max Resolution	2592 x 1944
Video Bit Rate	100Kbps ~ 10Mbps Multi-rate for Preview and Recording
Bitrate Control	Multi Streaming CBR/VBR (Controllable frame rate and Bandwidth)
Digital Noise Reduction	3D-DNR
Privacy Mask	16 programmable zones
Special Features	SMART Bitrate Control, Region of Interest
Other Image Processing	Configurable Exposure, White Balance, Sharpness
Image Orientation	Flip / Mirror / Corridor Mode
Analogue Output	1 (Installation only) CVBS 1.0V p-p (75Ω), 4:3 aspect ratio

AUDIO	
Audio Streaming	Two way
Audio Compression	G.711 u-law 8KHz, AAC-LC 48Kbps at 8KHz
Audio input	Supply voltage : 3VDC(3mA), Input impedance : 3K Ohm
Audio output	Line Out, MAX. Output Level : 1Vrms

EVENT	
Event Trigger	Motion Alarm, Temperature critical, DI
Pre-Post Recording	Pre: 1~5 sec Post: 1~240 sec
Event Notification	FTP, E-mail, Alarm-out, SD card

NETWORK	
Ethernet Standard	10 / 100Base-T
IP	IPv4
Protocol	TCP/IP, UDP, AutoIP, RTP(UDP/TCP), RTSP, NTP, HTTP, HTTPS, SSL, DNS, DDNS, DHCP, FTP, SMTP, ICMP, SNMPv1/v2/v3(MIB-2), ONVIF
Security	HTTPS(SSL), IP filtering, 802.1x, Digest Authentication
Plug In	ONVIF Profile S, CGI API

GENERAL	
Material	Aluminum Die-casting, White
External I/O Terminals	1 x Alarm In / 1 x Alarm Out
Language on webpage	English
Power Source	DC12V, PoE+(IEEE 802.3at Class 4)
Power Consumption	DC12V Max 13.2W, PoE Max 15.6W
Operating Conditions	Humidity 10 ~ 90% RH (non-condensing) [DC12V / PoE] -40°C ~ 50°C (-40°F ~ 122°F)
Cold Start	Supported
Approvals	FCC, CE, IP67, IK10
NDAA	Compliant
Weight	1.2 kg
Dimensions (D x H)	309.8mm x 96.7mm

EDGE STORAGE	
Storage	1x microSD / microSDHC / microSDXC (card not included)

## Technical Specifications

### VIDEO ANALYTICS

#### Features

**Analytics Engine** VCA Technology's advanced tracking algorithm with rich library of detection behaviors

**Detection Zones and Rules** 40 rules & zones (Multi-segment Polygons and Lines) as standard

**Intrusion Detection** Detection of the presence of an object

**Tamper Detection** Supported as standard

**Detection Behavior** Enter, Exit, Appear, Disappear, Stop, Direction, Dwell filter, Abandoned/Removed object filter, Tailgating, Color Filter


**Logical Rules** Extends standard rules to allow various combinations of the inputs

**Deep Learning Object Tracking** Deep learning based object identification (as Person, Cyclist, Car, Van, Truck, Motorcycle, Bicycle, Bag) removes false object detection

**Deep Learning People Tracking** Deep learning based people identification and tracking

**Counting & Line** High accuracy people and vehicle counting, 20 counters in total


**Meta Data** JSON format, Plain XML format that contains the event information and the tracked object information with the bounding box, tail history, object attributions (object type and color)



Technical Specifications

Dimensions

(Unit: mm)

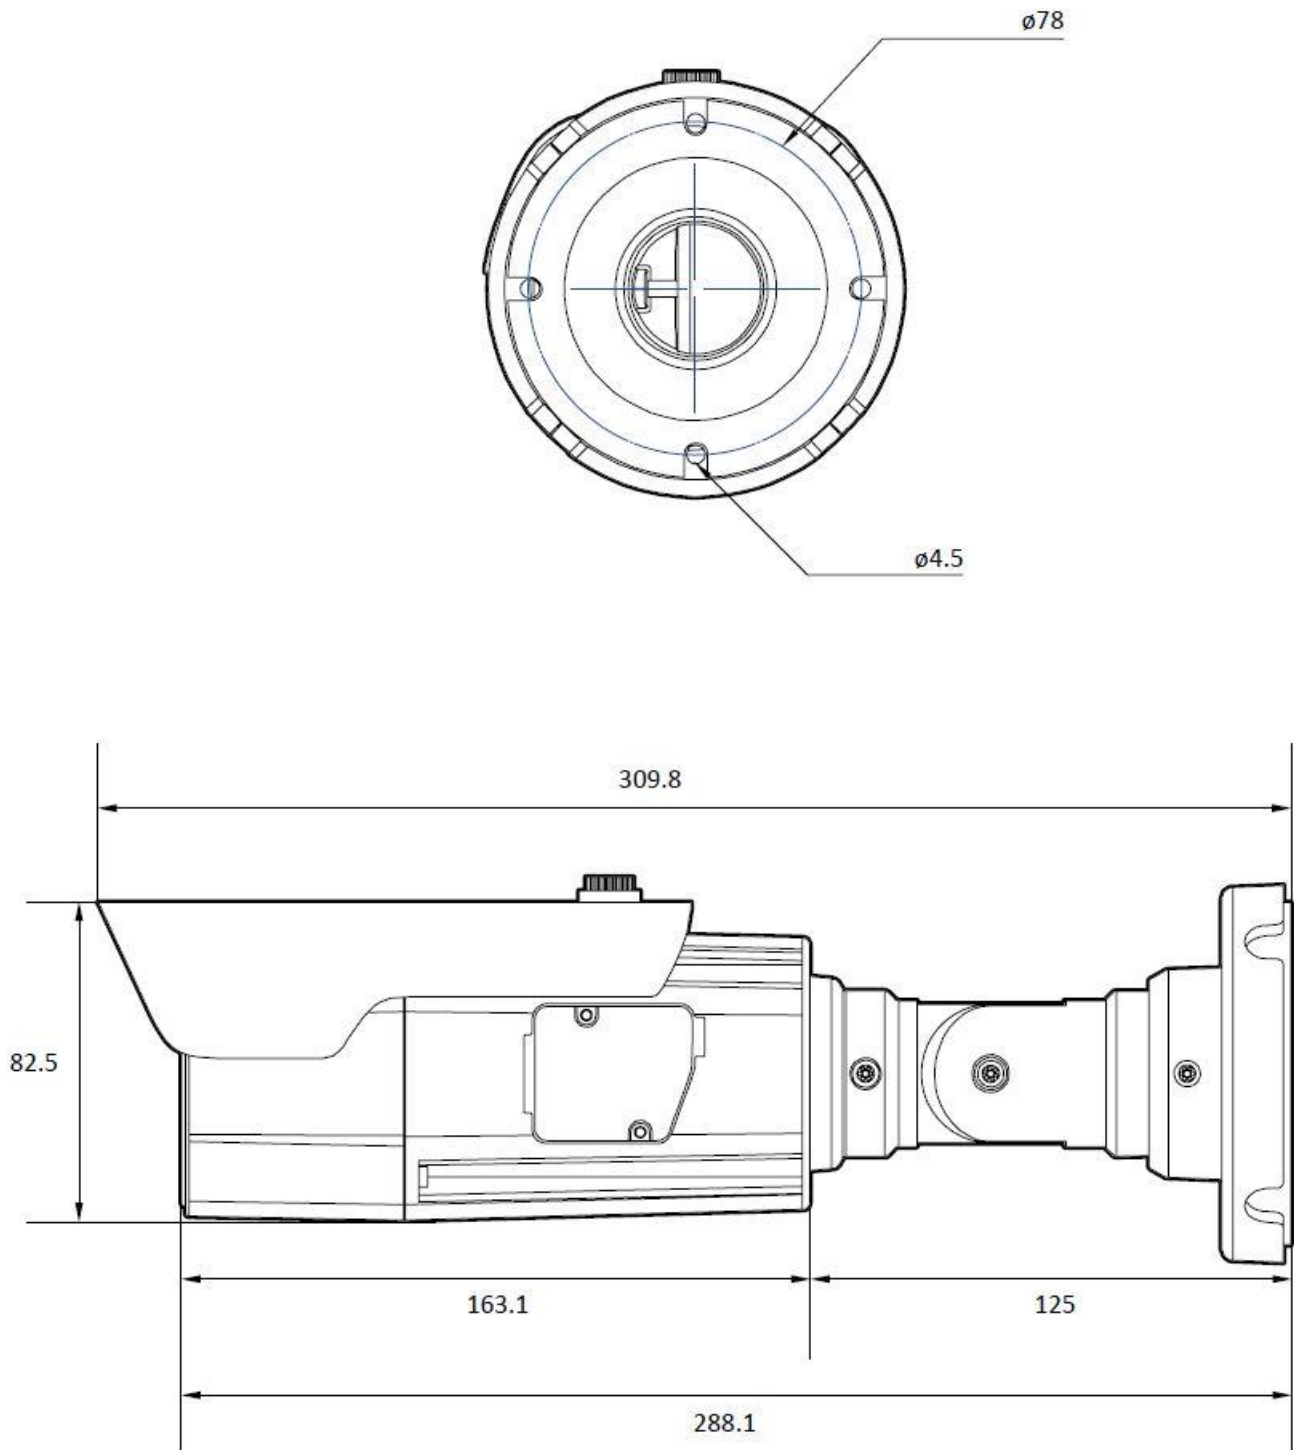

**Accessories**



**BP01**



**BCO01**



**BJC07**